


# ALYA SERIES LED LUMINAIRE

## HALL|STEP LIGHT, LOW-PROFILE SURFACE MOUNT



Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_  
 Product Code: \_\_\_\_\_

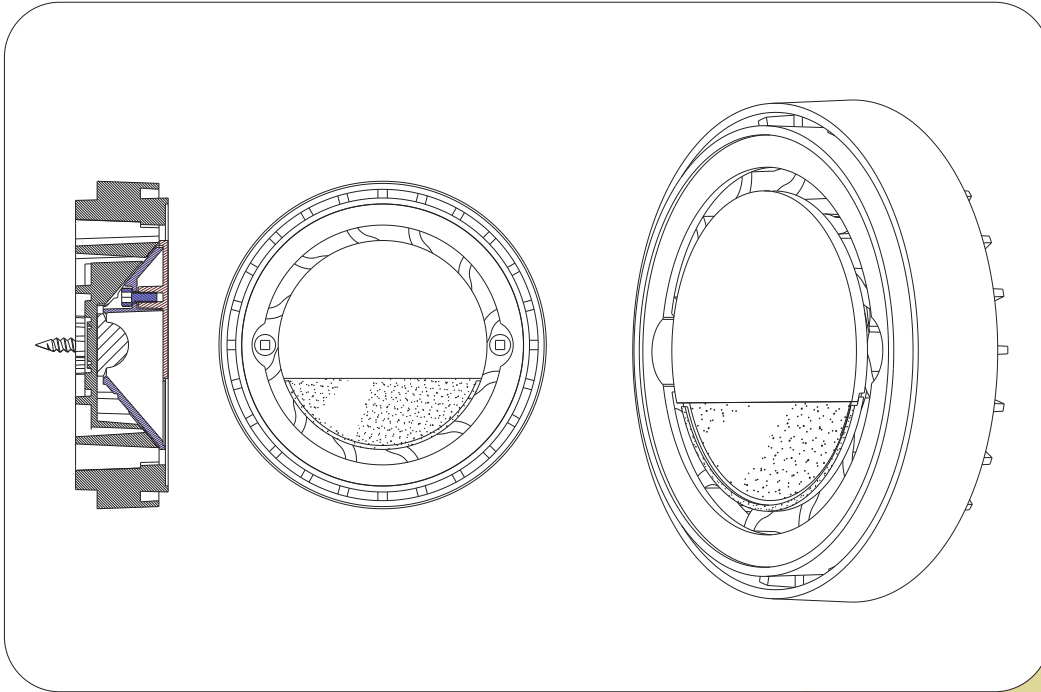

**DIMENSIONS**  
 Diameter: 3-5/16"  
 Depth: 1"  
 Mounting  
 Screw Spacing: 2-3/8"

LED is replaceable and  
 can be upgraded.

ADA Compliant

### PRODUCT CODE

Luminaire Type	LED	Finish	Option
<b>ASWM</b> - Alya Series Surface Wall Mounting	<b>3.6W8541K</b> - 3.6 W, 85CRI, 4100 K <b>3.6W8535K</b> - 3.6 W, 85CRI, 3500 K <b>3.6W8530K</b> - 3.6 W, 85CRI, 3000 K <i>Consult factory for 1.2 watt and 70 CRI choices.</i>	<b>WH</b> -White <b>AL</b> - Metallic Aluminum <b>BK</b> - Black <i>Consult factory for other finishes.</i>	<b>WET</b> - Wet Location modification with sealed electrical connection at board and stainless steel screws.

### PRODUCT SPECIFICATIONS

**HOUSING & REFLECTOR**  
 Die-cast Al housing, powder coat paint finish. Integral thermal management system utilizes expanded Al carrier attached by TiB<sub>2</sub> loaded adhesive to insure long life and lumen maintenance. Die cast Al reflector with diffuse metallic Al coating provides optimal balance of visual cut off and smooth, even light output.


**LED**  
 GE™ Vio™ high power violet-base white LED. 70 or 85 CRI. Less than 75K color shift and 70% lumen maintenance over 50,000 hour life. Sub binned by 3Style for LED to LED color variation: +/- 50K over full distribution. No Ultra Violet light. RoHS compliant, mercury free. Leads: 22" 26AWG with polarized quick connect. Electrical connection to board is sealed for WET option.

**REMOTE DRIVER (not included)**  
 Requires 350mA CC driver. See data sheet 3S04-10 for driver choices.

**MOUNTING**  
 Recessed, square drive, trim-head stainless steel screws (included).

**LISTINGS**  
 Manufactured with UL Recognized Components. Class 2 low voltage. Damp location. Wet location available.

### CANDELA DISTRIBUTION

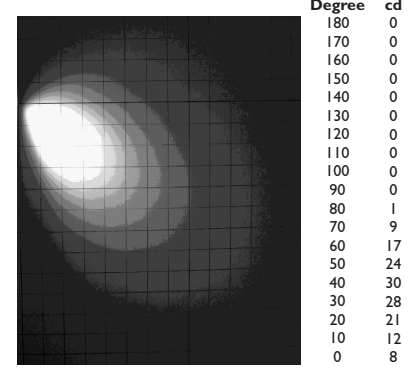

Patent Pending