


RECESSED WALL LED LUMINAIRE

HALL | STEP LIGHT, UP OR DOWN MOUNTING

Project: _____

Fixture Type: _____

Product Code: _____

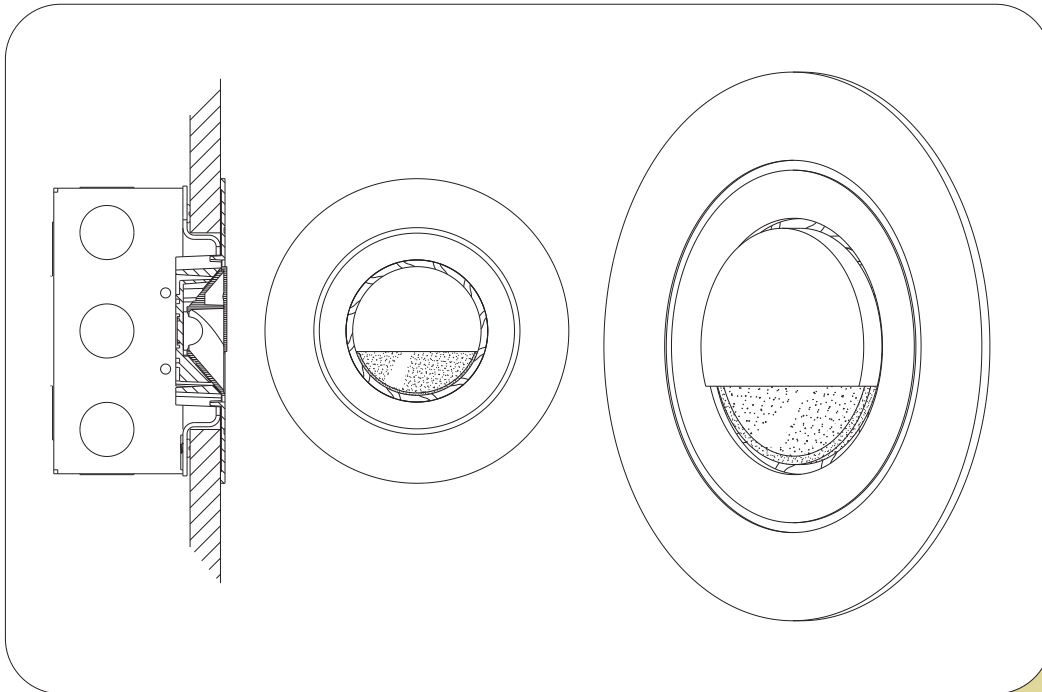

DIMENSIONS
LUMINAIRE:
 Diameter - 5"
 Extension from Wall - 3/32"
BACK BOX:
 Height x Width - 4-11/16"
 Mounting Depth - 2-1/8"
 Mud Ring - 3-3/16" dia. x 1/2"

LED is replaceable and can be upgraded.

ADA Compliant

PRODUCT CODE

Luminaire Type	LED	Supply Voltage AC	Finish
ARWM - Alya Series Recessed Wall Mounting	3.6W8541K - 3.6 W, 85CRI, 4100 K 3.6W8535K - 3.6 W, 85CRI, 3500 K 3.6W8530K - 3.6 W, 85CRI, 3000 K <i>Consult factory for 1.2 watt and 70 CRI choices.</i>	1 - 120 volts.	WH -White AL - Metallic Aluminum BK - Black <i>Consult factory for other finishes.</i>

PRODUCT SPECIFICATIONS

HOUSING & REFLECTOR

Die-cast Al housing, powder coat paint finish. Integral thermal management system utilizes expanded Al carrier attached by TiB₂ loaded adhesive to insure long life and lumen maintenance. Die cast Al reflector with diffuse metallic Al coating provides optimal balance of visual cut off and smooth even light output.

LED & DRIVER

GE™ Vio™ high power violet-base white LED. 85 CRI. Less than 75K color shift and 70% lumen maintenance over 50,000 hour life. Sub binned by 3Style for LED to LED color variation: +/- 50K over full distribution. No Ultra Violet light. RoHS compliant, mercury free. Constant current 100-240V, 50/60hz, 350mA driver mounts in back box. Consumes 4 system watts. Consult factory for other input voltages.


MOUNTING

Spring clips accommodate recessed mounting through horizontal surfaces from 1/2"-5/8" thick surfaces. Back-box is galv., 42 cu. in., and has both 1/2" & 3/4" eccentric knock outs for electrical supply and driver concealment. Blocking required.

LISTINGS

ETL certified to UL1598 and UL8750 . Damp location.

CANDELA DISTRIBUTION

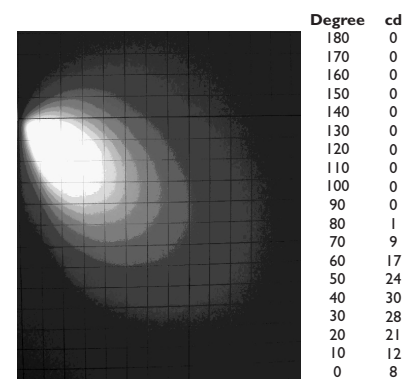

Patent Pending